
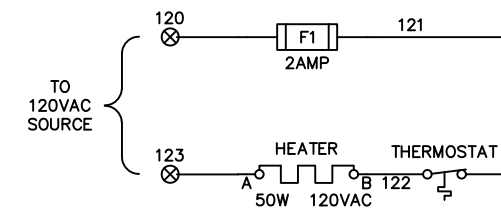
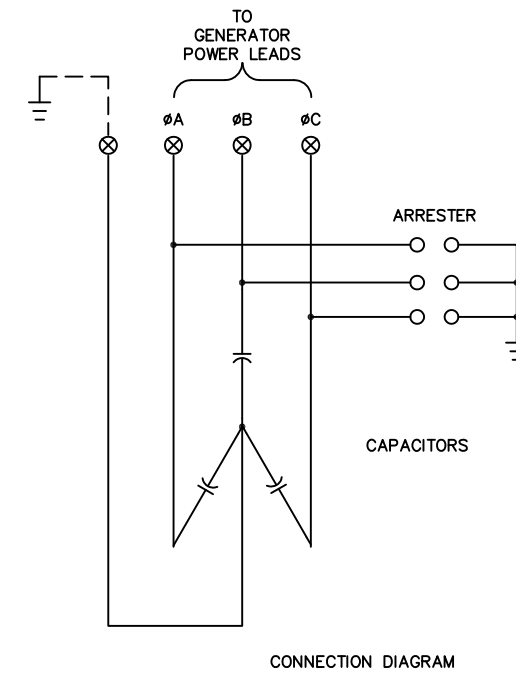



OUTLINE NOTES

- 1) SPECIFICATIONS:
 - A) SURGE PROTECTOR IS FOR USE WITH
 - (1) GENERATOR SET AT 24000 VAC 3PHASE LINE WITH UNGROUNDED NEUTRAL.
 - B) NOMENCLATURE DISCRIPTIONS, IF NOT ON THIS DRAWING (REFER TO LAKE SHORE STANDARD NOMENCLATURE.
 - C) * = CUSTOMER SUPPLIED EQUIPMENT.
- 2) ENCLOSURE CONSTRUCTION:
 - A) NEMA 3R, FREE-STANDING, 11 GA. SHEET METAL WITH 1.5"x4" 7 GA. CHANNEL BASE.
 - B) (1) HINGED FRONT DOOR AND (2) REMOVABLE PANEL(S) IN TOP AND BOTTOM.
 - C) MOUNTING DIMENSIONS ARE ±.125" ALL OTHER DIMENSIONS ARE APPROXIMATE.
- 3) ENCLOSURE FINISH:
 - A) PRIMED AND PAINTED ANSI-61 LIGHT GRAY.

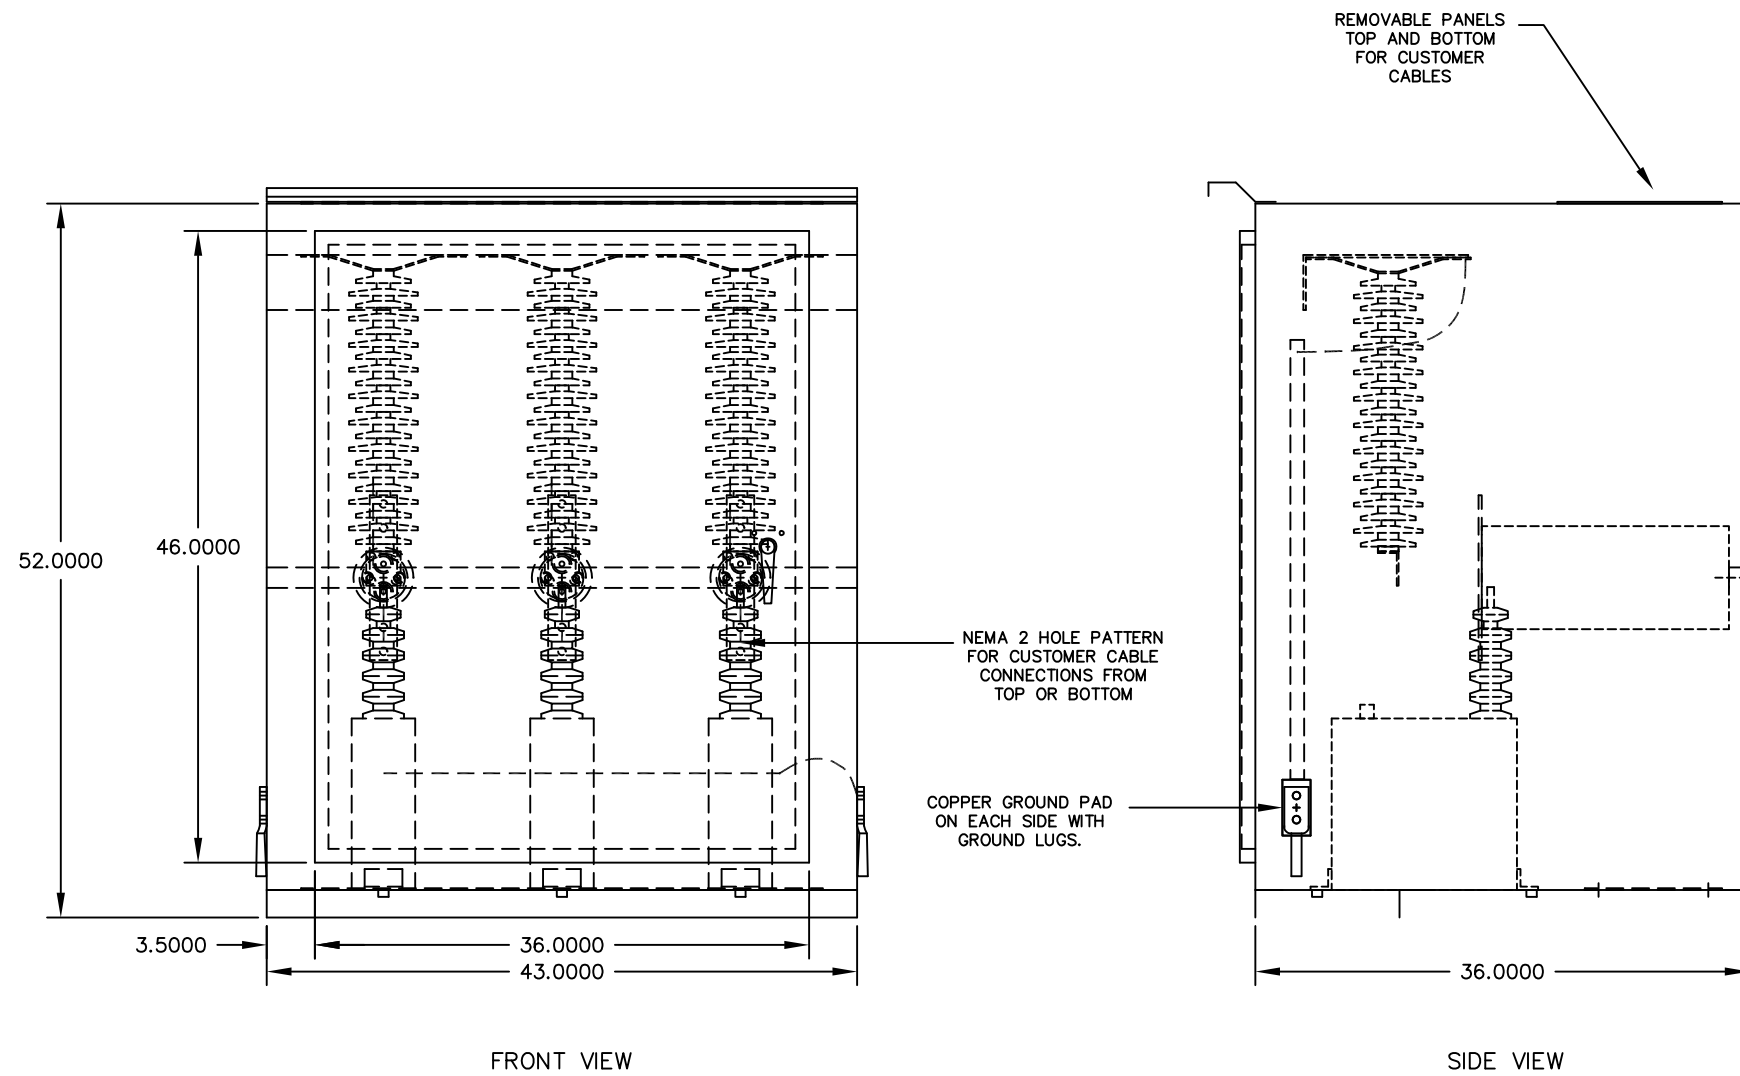

CUSTOMER

| | | | | | |
|---|--------|-----------|--|----|----------|
|  LAKE SHORE ELECTRIC CORPORATION Bedford, Ohio U.S.A. | | REVISIONS | | BY | DATE |
| | | | | | |
| SCALE | .1=1 | | | | |
| DATE | 040199 | | | | |
| DR'N | DJA | CK'D | | | |
| AP'VD | | | | | |
| TITLE | | | | | NO. |
| GENERATOR SURGE PROTECTOR OUTLINE | | | | | 60F24000 |