



(Recommended Cable Access Areas)

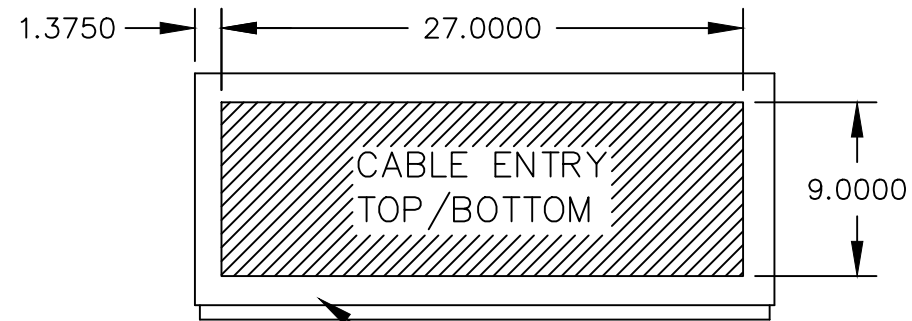


CABLE ENTRY TOP/BOTTOM

TOP VIEW

1.25"Hx2"W MOUNTING FEET 4-REQ.
(.563"DIA. HOLE-TOP)
(.563"SLOT-BOTTOM)

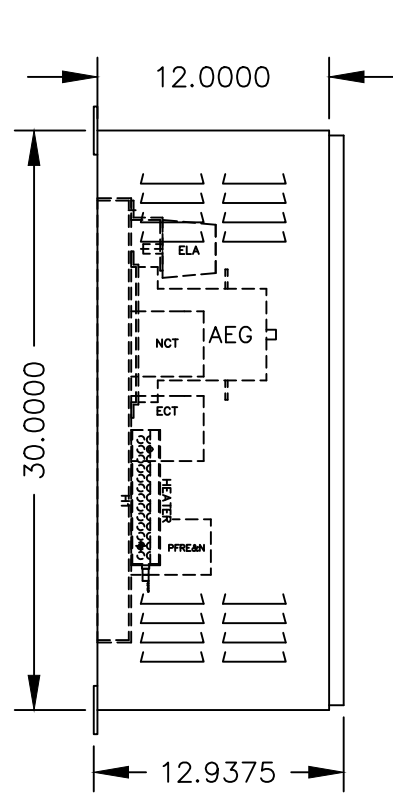

SIDE VIEW

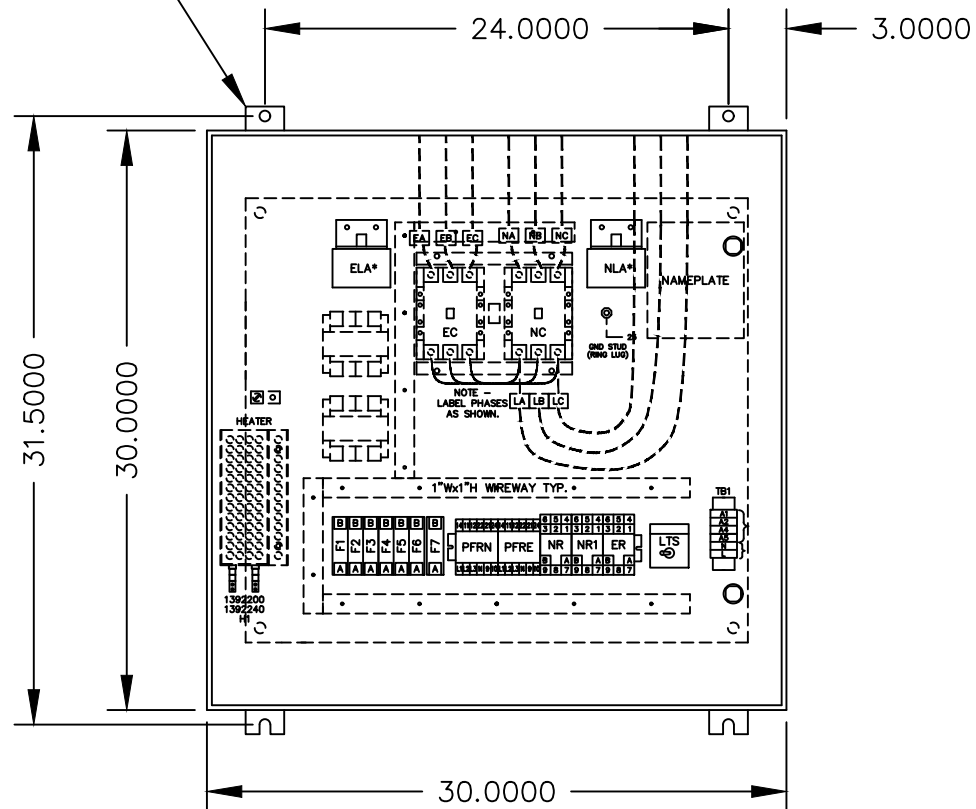


FRONT VIEW

OUTLINE NOTES

- 1) GENERAL ENCLOSURE CONSTRUCTION:
 - A) WALL-MOUNTED
 - B) 14 GA. SHEET METAL
 - C) 1 HINGED FRONT DOOR
 - D) MOUNTING DIMENSIONS ARE $\pm .0625"$, ALL OTHER DIMENSIONS ARE APPROXIMATE

- 2) NEMA 3R ENCLOSURE:
 - A) PADLOCKABLE
 - B) ALL SEAMS ARE CONTINUOUSLY WELDED
 - C) DOOR IS GASKETED

- 3) ENCLOSURE FINISH:
 - A) PRIMED & PAINTED ANSI-61 LIGHT GRAY (OTHER COLORS OPTIONAL)

| - | - | - | - | - |
|--|-------------|----------------|----------|------|
| - | - | - | - | - |
| - | - | - | - | - |
| REV | DESCRIPTION | BY | APV | DATE |
|  LAKE SHORE ELECTRIC Corp BEDFORD, OHIO U.S.A. FPLC30100_E ATS 240VAC 3P 3Ø 3W 100A | | | | |
| SCALE: | DRN: - - | CHK: - - | APV: - - | |
| THIS DOCUMENT IS THE PROPERTY OF Lake Shore Electric Corporation. UNDER COPYRIGHT LAW, DISTRIBUTION AND REPRODUCTION OF THIS DOCUMENT, IN WHOLE OR IN PART, IS PROHIBITED WITHOUT PRIOR WRITTEN PERMISSION FROM Lake Shore Electric Corporation. | | | | |
| PROJ: FPL-2J1C | | | | |
| CUSTOMER: | | DWG NUMBER | | |
| FLORIDA POWER AND LIGHT COMPANY | | FPLC30100_E-03 | | - |
| QUOTE/JOB#: | | PG | OF | |
| | | 1 | 1 | |

FPLC30100__ (FPL-____)